

**CEN-ISO-  
VA****Transport and storage tank for chemical  
industry**

# Krampitz®

**CUBIC  
GOOD**

Characteristic	Area of application/Media			Transport/Installation	
<b>E2</b> Double wall	<b>E12</b> Hazardous to groundwater	<b>E7</b> Highly flammable	<b>E11</b> Chemical industry	<b>E4</b> Filled trans- portable	<b>E8</b> Outside installation

The multi-functional, durable transportation and storage tank system for the logistics of the 21st century offers:

- Modern logistics through save transportation, transit and storage of chemical media
- Optimal utilization of space through the cubic form, EUR-pallet dimension and stackability for transportation and storage
- All around arranged tension sleeves and lifting eyes ensure the maximal security during transportation, loading and stacking



The container sets standard in functionality, usability and security. It is qualified with the certification of an IBC for transporting hazardous goods of the packaging groups II and III and is also qualified with the certification of a storage tank. These components of modern logistics can be used individually or as a tank battery, stationarily or transportably. The durable, double wall structure of steel guarantees a long-life cycle and the integrated vacuum leakage indicator guarantees security. The container is the best for the use in logistics companies, the chemical industry, in the mineral oil trade, mechanical engineering, aggregate construction and in the civil protection or in conflict areas.

Type/Art no.	Volumen		Length total	Width total	Height container	Height stacking	Height total	Weight empty*	Max. permissible stacking load	Max. permissible weight
	100 %	95 %								
	(l)		(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	(kg)	(kg)
CEN-ISO-1001-VA	1,050	1,000	2,250	1,100	556	803	878	550	7,050	1,780
CEN-ISO-1501-VA	1,570	1,500			821	1,068	1,143	660		2,510
CEN-ISO-2001-VA	2,100	2,000			1,091	1,338	1,413	770		3,240


Please note: Max. density of the filling goods is 1.2 kg/L.

\* According to the equipment weights can be vary.


Technical changes reserved!

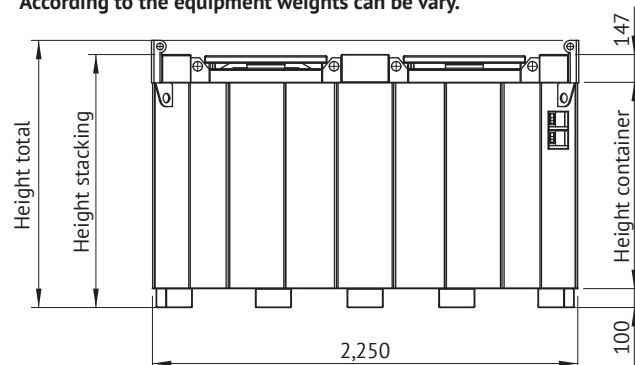

Container inside wall min. 3 mm

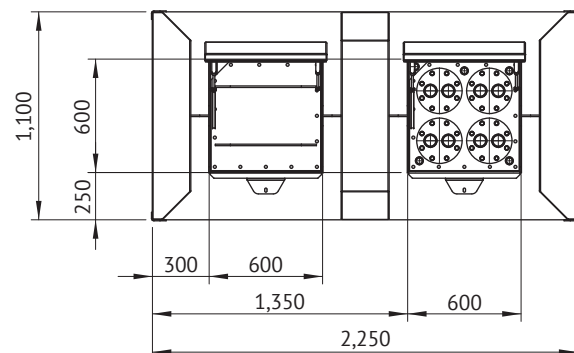

Attention: As an option it can be  
equipped to transport flammable media  
with a flash point < 55 °C.

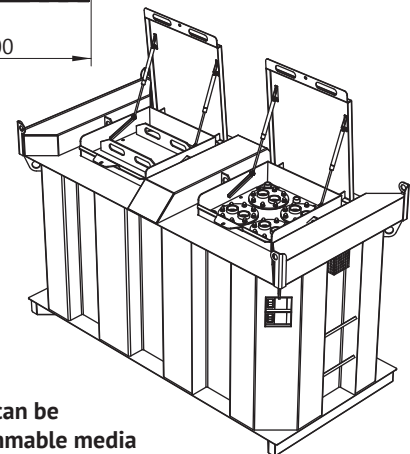

Material	Approval	Documentation	Sheet
Stainless steel 1.4401 1.4404 1.4571	IBC: D/BAM 7100/31A Storage tank: Z-38.12-23	1x English	1 of 3

**CEN-ISO-  
VA****Transport and storage tank  
Advantages**

# Krampitz®

**CUBIC  
GOOD**
**Corrosion protection for outside installation**

- Inside and outside: L-B-1 KTS standard coating system

**Documentation**

- Test certificate
- Overview drawing
- D/BAM and general technical approval
- Datasheets for equipment
- Certificates of WHG and ISO 9001

**Advantages**

- Tank for Transport, handling, storage and supply of fuels and oils
- International approval for ship, rail and road (IBC)
- General construction supervision approval as storage tank
- Extremely durable, high static firmness through double wall structure
- Minimization of the danger potential by vacuum leakage indicator and the arrangement of the equipment which is protected in the tank body
- Conceived for world-wide application and transportation
- Laid out for temperatures from -5 °C to 50 °C
- Optimal space capacity ratio due to the cubic design
- Saving transportation costs through standardized surface area according to EUR-pallet standard
- Optimized transit times, laid out for all usual loading techniques
- High loading security through integrated lashing eyes
- Quick connection and disconnection for filling and extraction of media by dry clutch
- Transport optimized dimensions for bringing in trucks and freight containers
- Quick and easy attachment of the tank body on a truck by lashing straps
- Handling with a crane or forklift
- Possible extension to battery systems
- Constructed also for the use under extreme conditions
- Installation inside buildings, outside and in water protection area
- Individual equipments allow adequate and practice-oriented solutions
- Two times stackable (space saving of floor area)

**UN 31A/Y/XX.XX/D/BAM 7100-KRAMPITZ/12690/\***

UN

Made, proved and approved according to the UN packing instructions

31A

IBC out of steel for liquid substances

Y

Approved for substances of the packaging groups II and III

XX.XX

Month and year of production

D

Country in which the approval was granted

BAM 7100-KRAMPITZ

Institution that grants the approval, approval number and manufacturer

12690


Test load of the stack pressure test in kg

\*


Maximum permissible weight in kg (see table on page 1)




Maximum permissible stacking load is mounted as a pictogram on the front side of the tank.

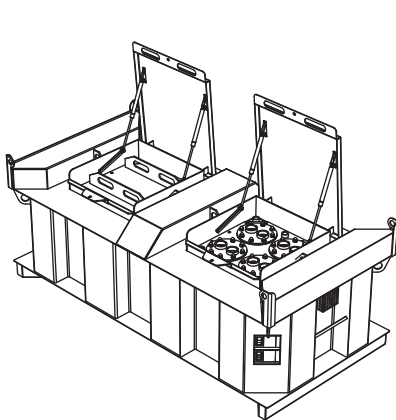

CEN-ISO-1001-VA

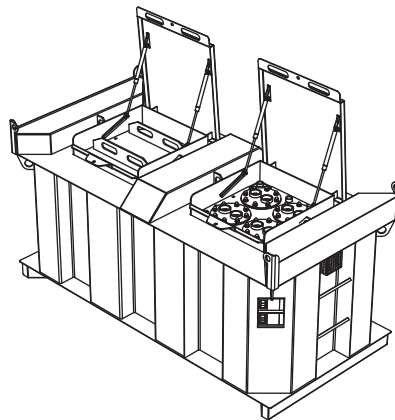

CEN-ISO-1501-VA

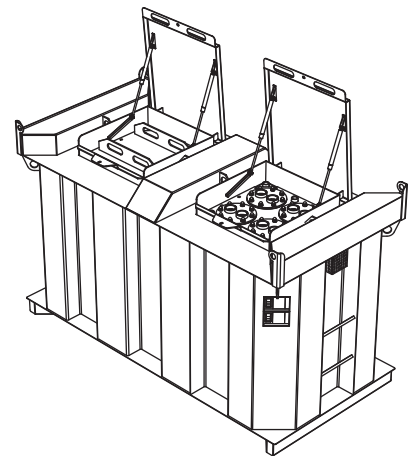


CEN-ISO-2001-VA

Technical changes reserved!


Material	Approval	Documentation	Sheet
Stainless steel 1.4401 1.4404 1.4571	IBC: D/BAM 7100/31A Storage tank: Z-38.12-23	1x English	2 of 3

**CEN-ISO-  
VA****Transport and storage tank  
Nozzle schedule and equipment**

# Krampitz®

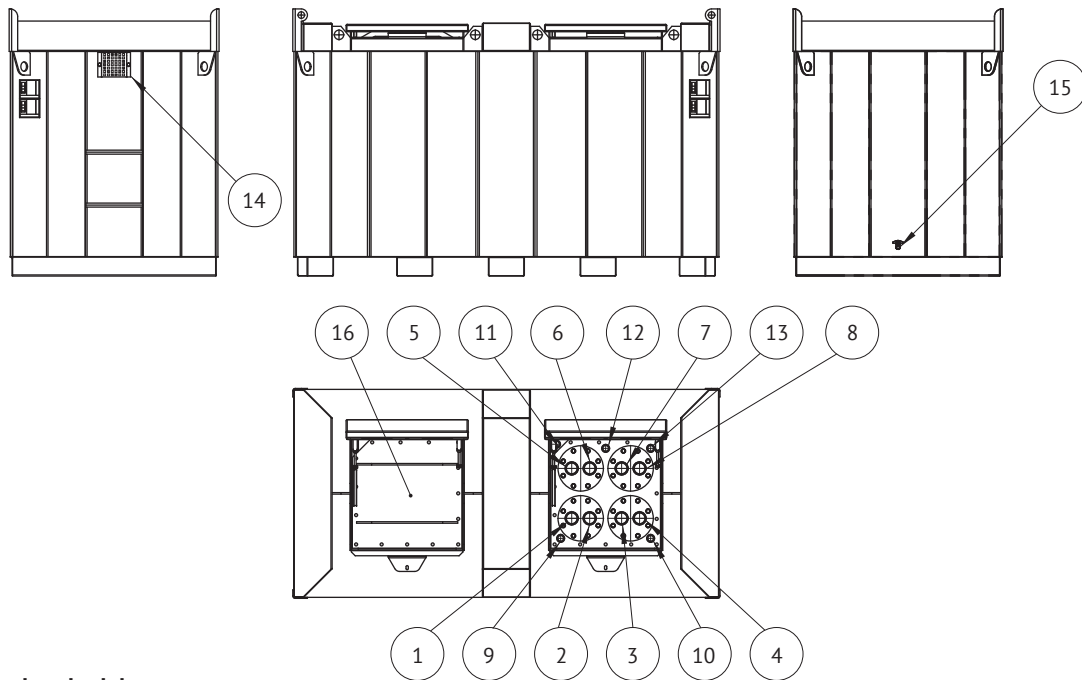**CUBIC  
GOOD**
**Nozzle schedule**

Pos.	Nom. diam.	Connection	Pos.	Nom. diam.	Connection
1	Sleeve G2"	Extraction, reduction, suction line 1" with check valve incl. ball valve	9	Sleeve G1"	Reserve, Blind plug
2	Sleeve G2"	Filling, filling pipe 2" incl. ball valve tanktruck filling pipe cap VK50	10	Sleeve G1"	Reserve, Blind plug
3	Sleeve G2"	Reserve, Blind plug	11	Sleeve G1"	Safety assembly for pressure equalization Safety valve -0.05 bar / +0.34 bar
4	Sleeve G2"	Level indicator, mechanical Reduction, dip stick with sounding pipe cap	12	Sleeve G1"	Ventilation Ball valve 1" with ventilation hood
5	Sleeve G2"	Reserve, Blind plug	13	Sleeve G1"	Reserve, Blind plug
6	Sleeve G2"	Reserve, Blind plug	14	Sleeve G1/2"	Instrument nozzle, static vacuum leakage indicator with type approval Protective plate
7	Sleeve G2"	Overfill protection, reduction limiting level transmitter with type approval	15	Sleeve G3/8"	Suction nozzle for creating vacuum Ball valve 3/8" with blind plug
8	Sleeve G2"	Protection against dry running, stuffing gland with 1x cable gland level transmitter (float switch)	16	-	Inspection opening Flange cover 520 x 520 mm

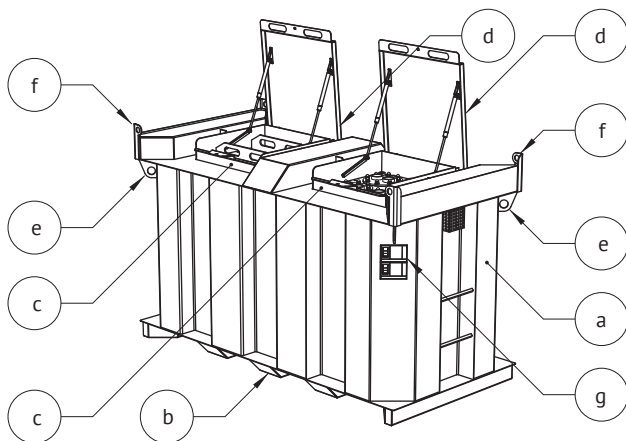**Equipment**

- a) Durable, cubic, double wall body
- b) Bottom assembly optimized for easy loading with forklift and lift truck
- c) Hatch element, equipment on tank roof, weatherproof and vandalism-proof
- d) Sealing hood with gas pressure spring and handle strip
- e) Lashing eyes, 4x
- f) Crane eye and stacking corner, 4x
- g) Type plate and UN marking IBC plate

Technical changes reserved!

Material	Approval	Documentation	Sheet
Stainless steel 1.4401 1.4404 1.4571	IBC: D/BAM 7100/31A Storage tank: Z-38.12-23	1x English	3 of 3