







model series	Product data sheet - as of 11/2023	
<b>TTE-B-EBZ</b>	<b>Single-walled day tank (earthquake zone 1-3)</b>	

# Krampitz

KUBISCH  
GUT

Characteristic	Area of application / media		Transport / installation	
				
<b>E1</b> single-walled	<b>E12</b> hazardous to groundwater	<b>E19</b> Flash point >55°C	<b>E3</b> cleaned and transportable	<b>E9</b> Interior use



The TTE-B-EBZ serves as a day tank for supplying units with fuel or lubricating oil. The TTE-B-EBZ is also known as a storage tank. Due to its structure and features, it meets the requirements for use in emergency power systems in accordance with VDE 107/108. It is suitable for installation in buildings as well as in system containers.

The installation area must be level, load-bearing and a collecting tray

be trained. If there is no collection space available on site, a collection tray must be used. The cubic design of the TTE-B-EBZ guarantees optimal use of space.


Special dimensions in length, width and height can be easily implemented. The only limits are the approval and transportability.

designation	Volume 100%	Volume 95%	length	length in total	Width	Total width	Height	Height in total	Weight
	l	l	mm	mm	mm	mm	mm	mm	kg
<b>TTE-B-100-EBZ</b>	106	100	510	550	500	525	505	530	38
<b>TTE-B-250-EBZ</b>	265	250	1,260	1,300	500	525	505	530	78
<b>TTE-B-500-EBZ</b>	500	470	1,510	1,550	750	775	505	530	115
<b>TTE-B-750-EBZ</b>	770	730	1,510	1,550	750	775	755	780	153
<b>TTE-B-990-EBZ</b>	1,020	980	2,010	2,050	750	775	755	780	192

material	Permit	documentation	Sheet
Steel S235JR	General building supervisors Approval Z-38.11-86	Test certificate 1x German	1 of 2



# Krampitz

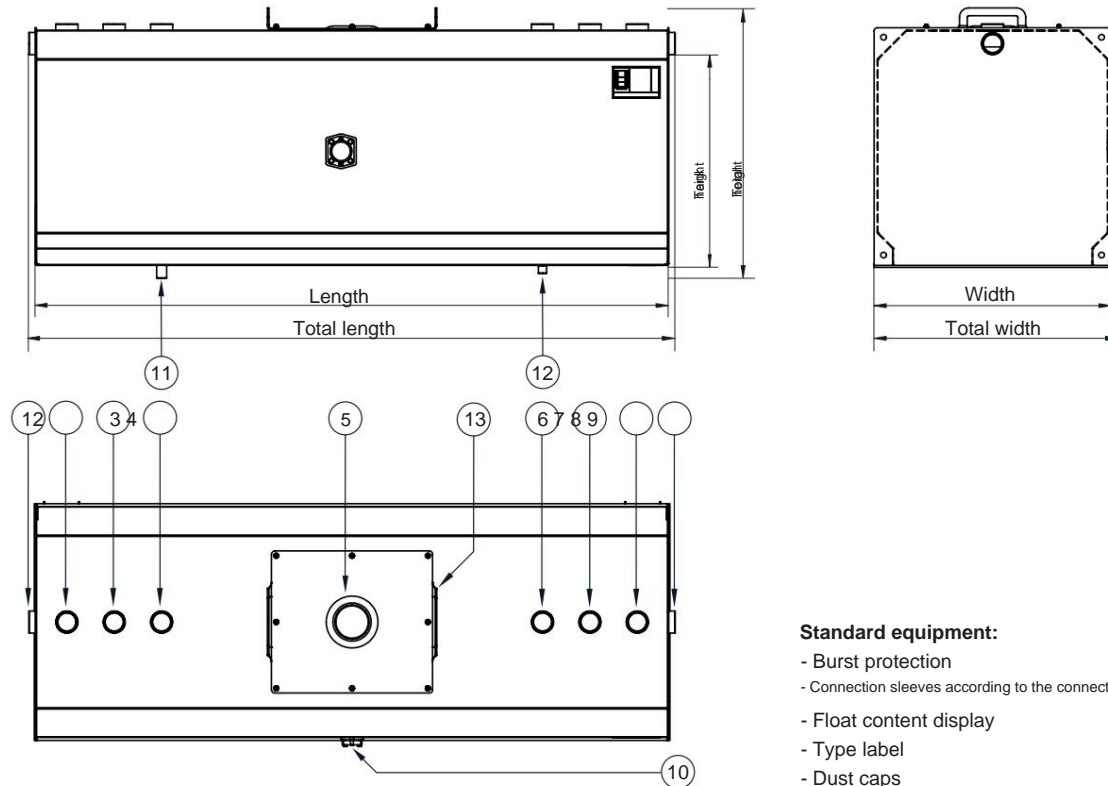

### Nozzle table

Pos.	nominal diameter	Connection
1	9 sleeve G2"	overflow
2	Sleeve G2"	filling
3	Sleeve G2"	Level indicator
4	Sleeve G2"	reserve
5	Ø 115 mm	burst protection
6	Sleeve G2"	reserve
7	Sleeve G2"	Rewind
8	Sleeve G2"	Venting
10	flange	Float content display front (up to TTE-B-990-EBZ)
11	Sleeve G 3/4"	feed
12	socket G 1/2"	residual emptying
13	390 x 450mm	inspection opening

(the inspection opening is adjusted for TTE-B-100-EBZ and TTE-B-250-EBZ)

### Standard equipment:

- Burst protection
- Connection sleeves according to the connection table
- Float content display
- Type label
- Dust caps

### Accessory package:

- Ventilation port 2" with hood
- Flow 3/4", ball valve 3/4", angle 90° 3/4"
- Residual emptying 1/2" with KFE tap 1/2"
- Reduction 2" x 3/4" (2x), Reduction 2" x 1" (2x)
- Blind plug 2" (4x) / Krampitz Sealfix 10 ml

### Accessories optional:

- Collection tray type TW-B
- Wall console type WK-B
- Foot type FS-B / column type ST-B
- Electronic content display
- Overfill protection / level indicator
- Pumps, tank heating
- Filling neck with pipe angle 2" 45° and TW connection K, 2"

### Corrosion protection:

- Exterior: LA-1 paint RAL 7032
- Inside: raw, oiled

### Special equipment:

- Painting in all RAL colors

Technical changes reserved!

material	Permit	documentation	Sheet
Steel S235JR	General building supervisors Approval Z-38.11-86	Test certificate 1x German	2 of 2