








model series	Product data sheet - as of November 11, 2023	
TTE-B-UR	Single-walled day tank (earthquake zone 1-3 Urea)	

Characteristic	Area of application / media			Transport / installation	
					
E1 single-walled	E12 hazardous to groundwater	E19 Flash point >55°C	E14 inside Special coating	E3 cleaned and transportable	E9 Interior use



Kramptitz



The TTE-B-UR serves as a day tank for supplying aggregates with urea in earthquake zones. The TTE-B-UR is also referred to as a storage tank. Due to its structure and features, it meets the requirements for use in emergency power systems in accordance with VDE 107/108. It is suitable for installation in buildings as well as in system containers. The installation surface must be level, load-bearing and designed as a collecting tray. There is none on site

If there is a collecting space, a collecting tray must be used. The cubic design of the TTE-B-UR guarantees optimal use of space. Special dimensions in length, width and height can be easily implemented. The only limits are the approval and transportability.

designation	volume 100%	volume 95%	length	length in total	Width	Width in total	Height	Height in total	Weight
			mm	mm	mm	mm	mm	mm	kg
TTE-B-500-UR	500	470	1,510	1,550	750	775	505	530	115
TTE-B-750-UR	770	730	1,510	1,550	750	775	755	780	153
TTE-B-990-UR	1,020	980	2,010	2,050	750	775	755	780	192

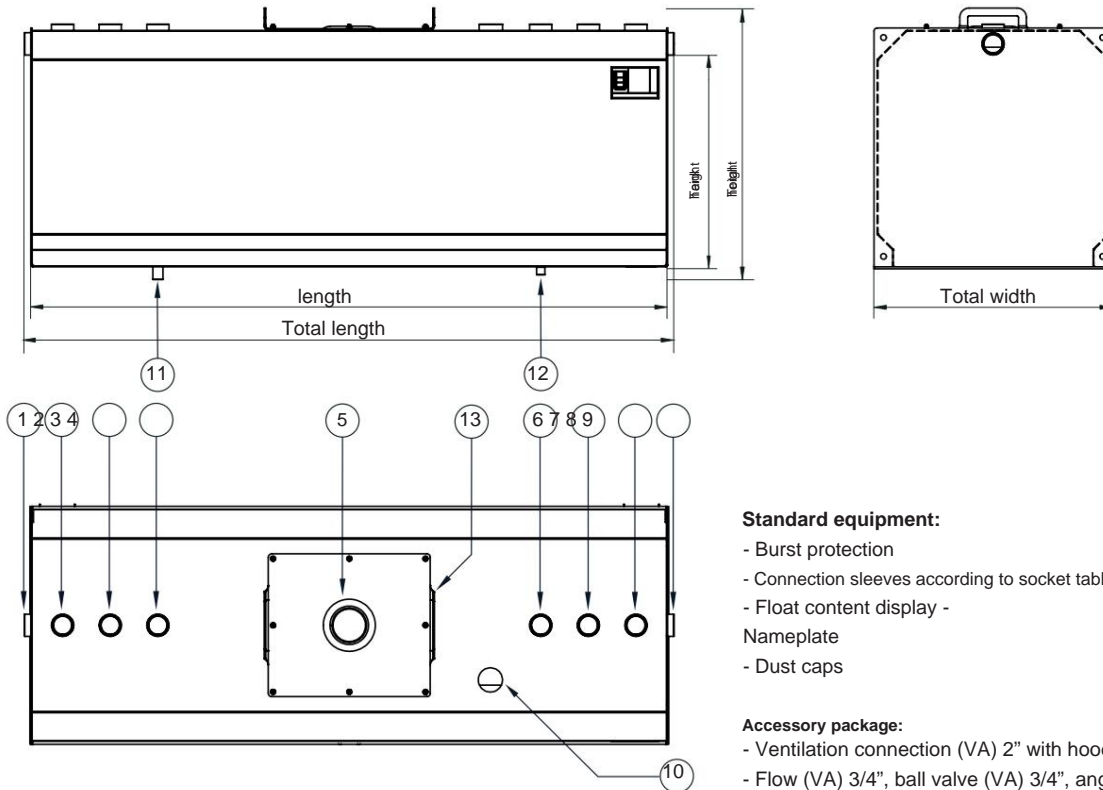
material	Permit	documentation	Sheet
Steel S235JR	General building supervisors Approval Z-38.11-86	Test certificate 1x German	1 of 2

TTE-B-UR

Single-walled day tank (earthquake zone 1-3 Urea)



Krampitz

**Standard equipment:**

- Burst protection
- Connection sleeves according to socket table (VA)
- Float content display - Nameplate
- Dust caps

Accessory package:

- Ventilation connection (VA) 2" with hood (PE)
- Flow (VA) 3/4", ball valve (VA) 3/4", angle (VA) 90° 3/4"
- Residual emptying (VA) 1/2" with KFE tap (VA) 1/2"
- Reduction (VA) 2" x 3/4" (2x), Reduction (VA) 2" x 1" (2x)
- Blind plug (VA) 2" (4x) / Krampitz Sealfix 10 ml

Accessories optional:

- Collection tray type TW-B
- Wall console type WK-B
- Foot type FS-B / column type ST-B
- Electronic content display
- Overfill protection / level indicator
- Filling neck with angle 2" 45° and TW connection VK50 (VA)

Corrosion protection:

- Exterior: LA-1 paint RAL 7032
- Inside: LI-2-UR

Special equipment:

- Painting in all RAL colors

Nozzle table**Pos. Nominal diameter connection**

1 / 9 sleeve G2"	overflow
2 Sleeve G2"	filling
3 Sleeve G2"	Level indicator
4 sleeve G2"	reserve
5 Ø 115 mm burst protection	
6 Sleeve G2"	reserve
7 Sleeve G2"	Rewind
8 Sleeve G2"	Venting
10 sleeve G2"	Content display
11 Sleeve G 3/4" feed	
12 socket G 1/2" residual emptying	
13 390 x 450mm inspection opening	

Technical changes reserved!

material	Permit	documentation	Sheet
Steel S235JR	General building supervisors Approval Z-38.11-86	Test certificate 1x German	2 of 2